



1432.663



1432.665



Profile

- Three-layer material with foamed core
- Top and bottom made of rugged synthetic rubber
- Conductive backing
- Resistant to solder and heat
- Abrasion resistant
- Halogen free
- Elastic
- Volume conductive
- Shock-absorbing, e.g. for the handling of sensitive equipment
- Thickness: 3 mm
- Includes 2 x 10 mm snap fastener and

IEC  
EN


Part Nr.	Colour	Standard Sizes
<b>1432.663.L*</b>	Platinum grey	610 x 1220 mm
<b>1432.663.S*</b>	Platinum grey	610 x 900 mm
<b>1432.663.R</b>		rolls: 1220 mm x 10 m
<b>1432.663.R61</b>		rolls: 610 mm x 10 m
<b>1432.663.Z</b>		Custom sizes available on request

\*rounded edges (radius approx. 43 mm)

Part Nr.	Colour	Standard Sizes
<b>1432.665.L*</b>	Royal blue	610 x 1220 mm
<b>1432.665.S*</b>	Royal blue	610 x 900 mm
<b>1432.665.R</b>		rolls: 1220 mm x 10 m
<b>1432.665.R61</b>		rolls: 610 mm x 10 m
<b>1432.665.Z</b>		Custom sizes available on request

\*rounded edges (radius approx. 43 mm)

**ECOSTAT®**  
MATS FOR SHELVES

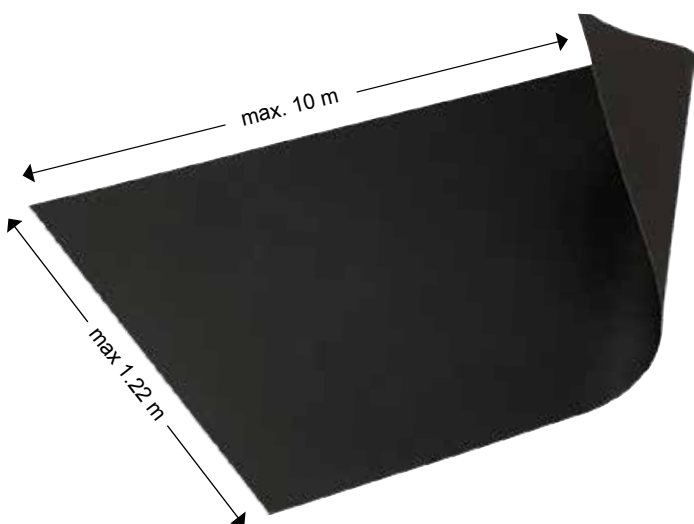

conductive  
backing

- Two layer material
- Rugged synthetic rubber
- Resistant to solder and heat
- Abrasion resistant
- Halogen free
- Elastic
- Volume conductive
- Thickness: 1,5 mm

IEC  
EN

Part Nr.	Colour	Standard Sizes
<b>1452.659.R</b>	Black	rolls: 1220 mm x 10 m
<b>1452.659.R61</b>	Black	rolls: 610 mm x 10 m
<b>1452.659.R40</b>	Black	rolls: 400 mm x 10 m
<b>1452.659.Z</b>		Custom sizes available on request

