








CT 5800 CATERING TRUCK

VAN BODY	The steel constructed body is covered with insulation material filled polyester plates. The van-body is lifted by a scissors system powered by two single acting telescopic hydraulic cylinders. The van-body provides a lock system for trolleys mounted the side walls. Adequate ventilation is provided inside the van body. Th van body provides front/rear roller doors. The front platform is produced by steel profiles and is hot dip galvanized. It move with van body to serve the aircraft. The front platform provides an extendible part moved by a hydraulic cylinder and an access bridge which moves longitudinally along the front platform. The floor is covered with checkered aluminum.		
FRONT PLATFORM			
TRUCK	Subject to customer's demand.		
HYDRAULIC SYSTEM	The hydraulic system is provided by an oil tank, a pump driven by truck engine, cylinders, lock valves, hydraulic valves and some useful accessories. Emergence hand pump is also used in case of engine failure. 4 hydraulic stabilizers are provided for more stability.		
SURFACES	The platform and the tail lift is hot dip galvanized and the other parts are custom painted.		
LIGHTING	LED type lighting fixtures, headlamps in front and rear of the platform, gabary lamps at the corners and a beacon are provided on the van body.		
OPTIONS	Tail lift, canopy, electrical emergency pump, cooling system for van body and the driver cab, side door, emergency stair, custom painting, logo application.		





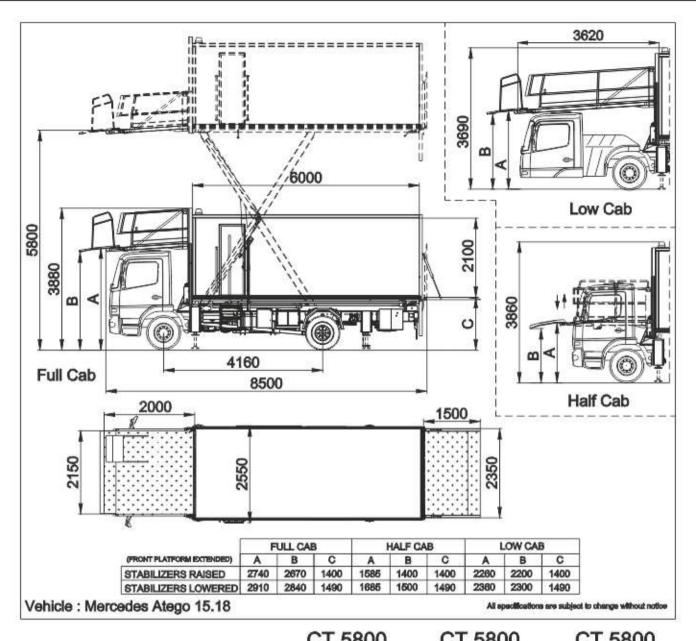

Technical Data	(Full Cab)	(Half Cab)	(Low Cab)
Overall Length (mm)			
Overall Width (mm)	2550	2500	2500
Overall Height (mm)	3860	3860	3860
Van Body Length (mm)	6000	7000	7000
Van Body Width (mm)	2300	2300	2300
Van Body Height (mm)	2100	2100	2100
Front Platform Dimension (I x w) (mm)	2000 x 2150	2110 x 900	3340 x 2150
Min./Max. Servicing Height (A) (mm)	2740 - 5800	1585 - 5800	2260 - 5800
Min./Max. Servicing Height (B) (mm)	2670 - 5800	1400 - 5800	2200 - 5800
Tail Lift Height (opt.) (C) (mm)	0 - 1490	0 - 1490	0 - 1490
Van Body Carrying Capacity (kg)	4000	4000	4000
Front Platform Carrying Capacity (kg)	500	500	500
Tail Lift Carrying Capacity (kg)	1000	1000	1000
Dead Weight(kg) (approx.)	10650	10420	10420
Shipping Dimensions (I x w x h) (mm)	8600x2650x3960	9800x2600x3960	11100x2600x3960
Shipping Conditions (mm)	1 ea, 40" flat	1 ea, 40" flat	1 ea, 40" flat

