

→ Series 9040

9040

Pressure reducing valves
made of stainless steel
with threaded connections

EDITION - THE BETTER CHOICE!

G06Fi



EAC

■ MATERIAL



■ SPECIFICATION



1/2" – 2"



+5°C to +85°C



Inlet pressure:
up to 25 bar
Outlet pressure:
0,5 - 12 bar

■ SUITABLE FOR

Potable water cold

up to 40°C



Potable water hot

up to 85°C



■ EXAMPLES OF USE

Protection of water supply systems in single-family homes, apartment buildings, commercial and industrial buildings or machines against excessive supply pressure. Usage of pressure reducing valves when a constant supply pressure is required in the system.

- Protection against overpressure
- Increase of comfort and reduction of water consumption

- Drinking water supply systems
- Service water supply in industrial and building services engineering
- Machines / plants connected to the drinking water network
- Irrigation technology / Cattle fattening

■ FEATURES

- First class flow rate and pressure control
- Filter screen - protection of the system with easy cleaning and contamination detection
- Housing made of stainless steel V4A
- High-quality plastic from medical technology sector
- Adjustment scale visible from two angles for adjustment without pressure gauge / operating pressure

■ APPROVALS

DIN-DVGW type test approval (up to 80°C) | pending

Type approval ACS | pending

Approval for England | pending

Requirements

DIN EN 1567
DIN 4109
UBA BWGL for metallic materials
DVGW W270

Elastomere guideline
KTW guideline

■ MATERIALS

Component	Material	DIN EN
Body	Stainless steel	1.4408
Valve insert	Plastic Stainless steel Elastomere	PPSU 1.4404 EPDM
Filter cup	Plastic	PA
Filter screen	Plastic Stainless steel	POM 1.4401
Spring housing	Plastic	PA Glass fibre reinforced
O-rings	Elastomere	EPDM
Plugs	Plastic	PA Glass fibre reinforced

Series 9040 ■ AVAILABLE NOMINAL DIAMETERS AND CONNECTION SIZES

Nominal diameter DN	15	20	25	32	40	50
Connection G1 threaded nozzle connection DIN EN 10226-1	R ½"	R ¾"	R 1"	R 1 ¼"	R 1 ½"	R 2"

■ NOMINAL PRESSURE RATING PN

16	Nominal pressure rating PN16, max. Inlet pressure 16 bar	Version with filter cup made of plastic
25	Nominal pressure rating PN25 max. Inlet pressure 25 bar	Version with filter cup made of stainless steel

■ OUTLET PRESSURE RANGES

SP	Standard version	Inlet pressure: up to 25 bar	Outlet pressure: from 1,5 to 7 bar
HP	High-pressure version	Inlet pressure: up to 25 bar	Outlet pressure: from 3 to 12 bar
LP	Low-pressure version	Inlet pressure: up to 25 bar	Outlet pressure: from 0,5 to 3 bar

■ TEMPERATURE RANGES


C	Potable water cold up to 40°C	Version with filter cup made of plastic
H	Potable water hot up to 85°C	Version with filter cup made of stainless steel

■ TYPE OF CONNECTION

Threaded with nozzle connection	Standard	Threaded nozzle connection with male thread BSP-T	DIN EN 10226-1
Hose nozzle screw fitting	On request	According to customer configuration	
Bulkhead fitting for mounting	On request	According to customer configuration	

Series 9040: Connection, installation dimensions, ranges of adjustment							
Connection	DN	15	20	25	32	40	50
Threaded nozzle connection DIN EN 10226-1	G1	R 1/2"	R 3/4"	R 1"	R 1 1/4"	R 1 1/2"	R 2"
Connection body DIN ISO 228-1	G2	G 3/4"	G 1"	G 1 1/4"	G 1 1/2"	G 2"	G 2 1/2"
Inlet pressure filter cup made of plastic	bar	max. 16	max. 16	max. 16	max. 16	max. 16	max. 16
Inlet pressure filter cup made of stainless steel	bar	max. 25	max. 25	max. 25	max. 25	max. 25	max. 25
Operating temperature filter cup made of plastic	°C	40	40	40	40	40	40
Operating temperature filter cup made of stainless steel	°C	85	85	85	85	85	85
Outlet pressure SP	bar	1,5 - 7	1,5 - 7	1,5 - 7	1,5 - 7	1,5 - 7	1,5 - 7
Outlet pressure HP	bar	3 - 12	3 - 12	3 - 12	3 - 12	3 - 12	3 - 12
Outlet pressure LP	bar	0,5 - 3	0,5 - 3	0,5 - 3	0,5 - 3	0,5 - 3	0,5 - 3
Installation dimensions in mm	L	140	160	180	200	225	255
	I	80	90	100	105	130	140
	H	89	89	111	111	151	151
	h	58	58	64	64	94	94
	T1	37	37	46	46	50	50
	SW1	30	37	46	52	65	80
	SW2	46	46	66	66	75	75
	SW3	46	46	65	65	75	75
	G3	1/4" axial	1/4" axial	1/4" axial	1/4" axial	1/4" axial	1/4" axial
	G3	1/4" axial	1/4" axial	1/4" axial	1/4" axial	1/4" axial	1/4" axial
Weight	kg	0,8	0,9	1,7	1,9	3,9	4,5
Coefficient of flow Kvs	m³/h	3,4	4,4	9,3	10,5	19,5	20,5

MAIN DIMENSIONS, INSTALLATION DIMENSIONS

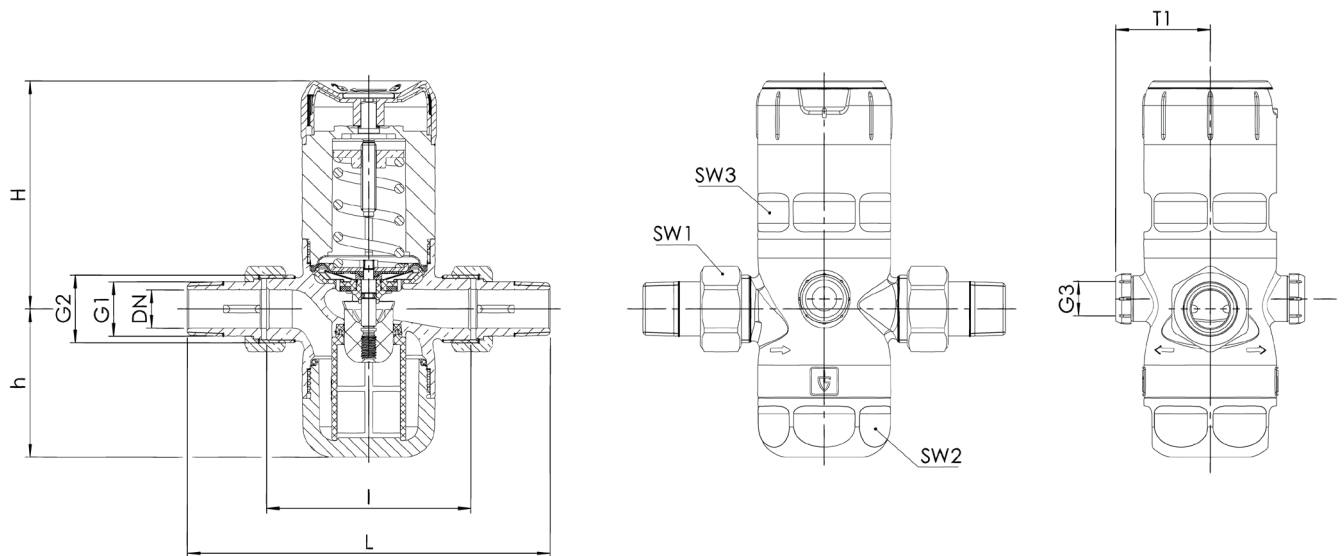

Series 9040 ■ INDIVIDUAL SELECTION / VALVE CONFIGURATION

Series	Nominal diameter DN	Nominal pressure rating PN	Outlet pressure range	Temperature range	Options
9040	15	16	SP	C	S17
9040	20	25	HP	H	S20
9040					
9040					

■ PROPERTIES

S17	Supply with manometers suitable for the valve finish (SP: 0- 10 bar LP: 0 – 4 bar HP: 0 – 25 bar)	<input type="checkbox"/>
S20	Supply without threaded connections	<input type="checkbox"/>
		<input type="checkbox"/>

■ CERTIFICATES / APPROVALS

C01	Factory certificate acc. DIN EN 10204 2.2 (WKZ 2.2)	<input type="checkbox"/>
C02	Test certificate acc. DIN EN 10204 3.1 (WPZ 3.1)	<input type="checkbox"/>
C03	Material test certificate acc. DIN EN 10204 3.1 (MPZ 3.1) (pressure retaining part)	<input type="checkbox"/>

■ ADMISSIONS / ACCREDITATIONS

AA1	EC Type examination acc. to Directive 2014/68/EU	<input checked="" type="checkbox"/>	AB2	Water regulations and advisory scheme WRAS type approval	<input type="checkbox"/>
AA4	EAC - certificate/declaration with passport for the valve and laser marking of the valve	<input type="checkbox"/>	AB3	Attestation de Conformité Sanitaire, ACS type approval	<input type="checkbox"/>
AB1	Deutscher Verein des Gas- und Wasserfaches, DVGW type approval	<input type="checkbox"/>			<input type="checkbox"/>

■ ENQUIRY


Copy and send to: order@goetze-armaturen.de.

Order form easily to be found online under the section for each series.

Series 9040:

Dimensioning by pressure loss on the outlet pressure side


Flow chart water

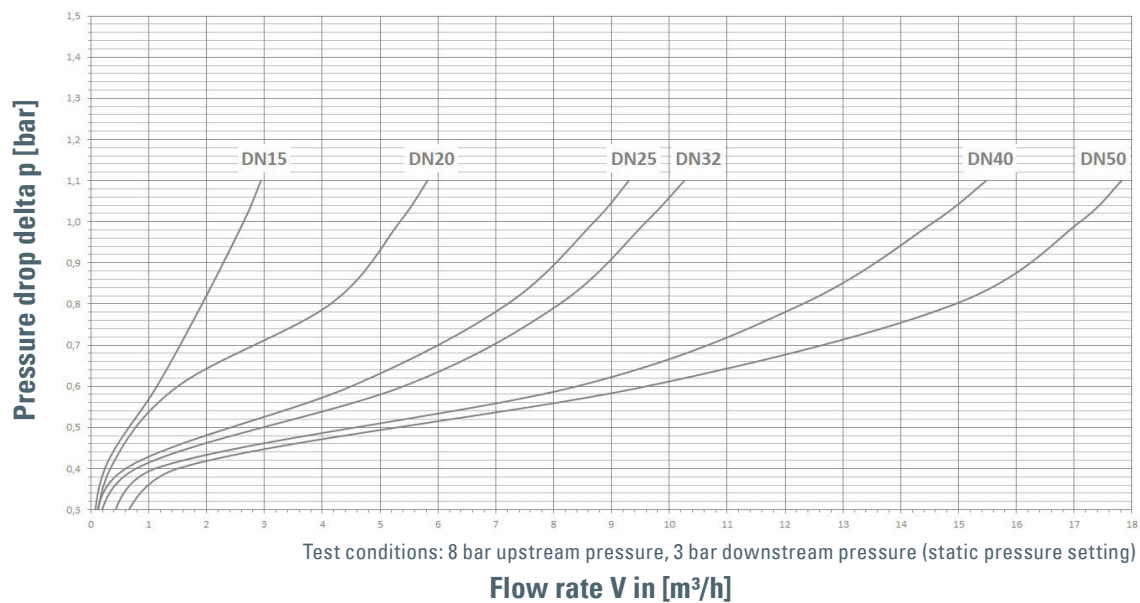


Dimensioning by flow velocity

For liquids:

With help of the chart you can determine the nominal diameter (DN) for a given flow volume V (m³/h). According to DVGW-guidelines (DIN 1988) a flow velocity of 2 m/s in domestic water supply systems should not be exceeded.

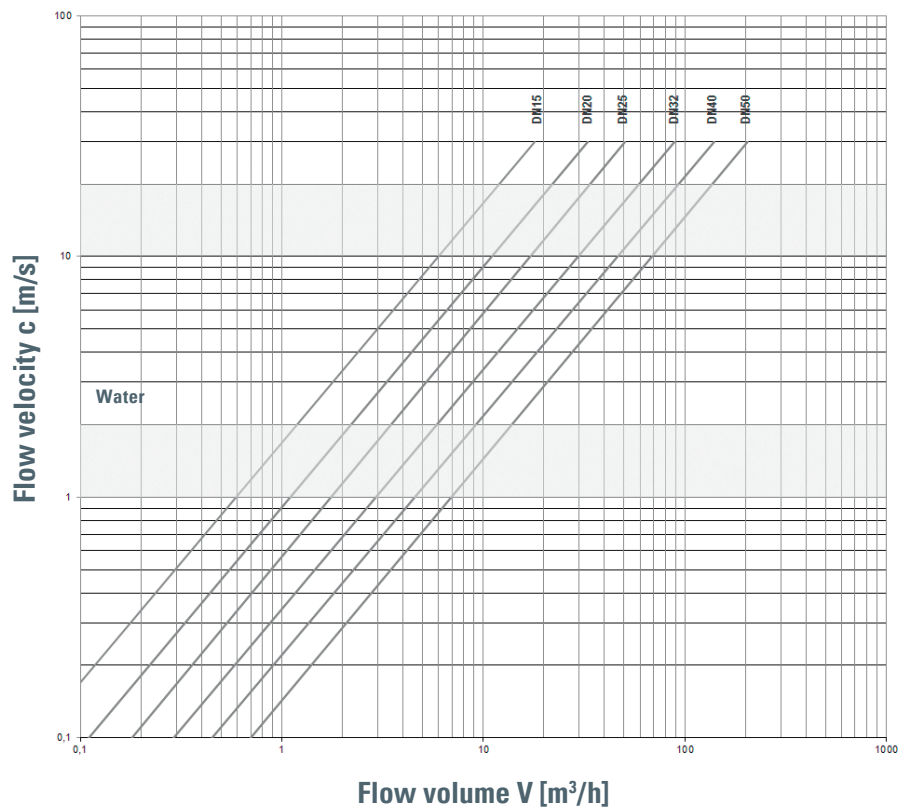

→ Spare parts overview | 9000 / 9040

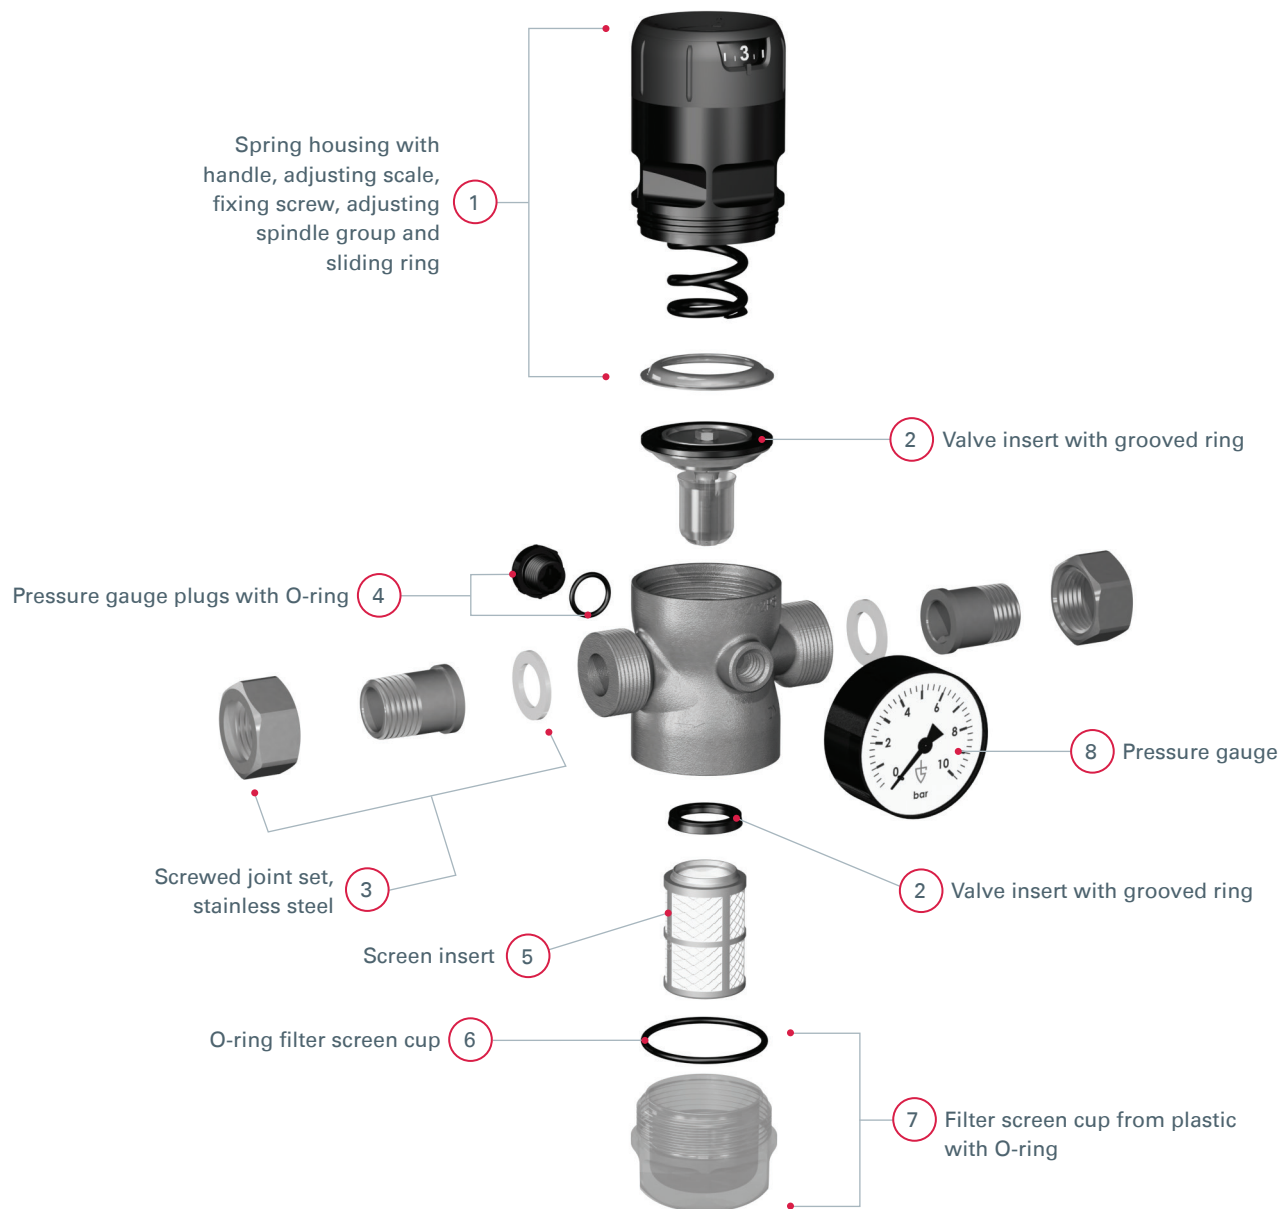

■ SINGLE PARTS 9000 / 9040

No.	Description	Size	Item No.
1	Spring housing with handle, adjusting scale, fixing screw, adjusting spindle group and sliding ring	1/2" – 3/4"	E9000.015.010
		1" – 1 1/4"	E9000.025.010
		1 1/2" – 2"	E9000.040.010
2	Valve insert with grooved ring	1/2" – 3/4"	E9000.015.020
		1" – 1 1/4"	E9000.025.020
		1 1/2" – 2"	E9000.040.020
3a	Screwed joint set 2x threaded nozzles 2x union nuts 2x seals	1/2"	E9000.015.030
		3/4"	E9000.020.030
		1"	E9000.025.030
		1 1/4"	E9000.032.030
		1 1/2"	E9000.040.030
		2"	E9000.050.030
3b	Screwed joint set, lead-free 2x threaded nozzles 2x union nuts 2x seals	1/2"	E9000.015.031
		1/2"	E9000.015.031
		3/4"	E9000.020.031
		1"	E9000.025.031
		1 1/4"	E9000.032.031
		1 1/2"	E9000.040.031
3c	Screwed joint set, stainless steel 2x threaded nozzles 2x union nuts 2x seals	2"	E9000.050.031
		3/4"	E9040.020.032
		1/2"	E9040.015.032
		3/4"	E9040.020.032
		1"	E9040.025.032
		1 1/4"	E9040.032.032
4	Pressure gauge plugs 1/4" with O-ring (5x)	1 1/2"	E9040.040.032
		2"	E9040.050.032
5	Screen insert 160µm	1/2" – 3/4"	E9000.015.040
		1" – 1 1/4"	E9000.025.050
		1 1/2" – 2"	E9000.040.050
6	O-ring filter screen cup (10x)	1/2" – 3/4"	E9000.015.060
		1" – 1 1/4"	E9000.025.060
		1 1/2" – 2"	E9000.040.060
7a	Filter screen cup from plastic with O-ring	1/2" – 3/4"	E9000.015.070
		1" – 1 1/4"	E9000.025.070
		1 1/2" – 2"	E9000.040.070
7b	Filter screen cup from gunmetal, lead-free with O-ring	1/2" – 3/4"	E9000.015.071
		1" – 1 1/4"	E9000.025.071
		1 1/2" – 2"	E9000.040.071
7c	Filter screen cup, stainless steel with O-ring	1/2" – 3/4"	E9040.015.072
		1" – 1 1/4"	E9040.025.072
		1 1/2" – 2"	E9040.040.072
8a	Pressure gauge 0 – 10 bar	All	E9000.015.080
8b	Pressure gauge 0 – 25 bar	All	E9000.015.081
8c	Pressure gauge 0 – 4 bar	All	E9000.015.082